


KUBE

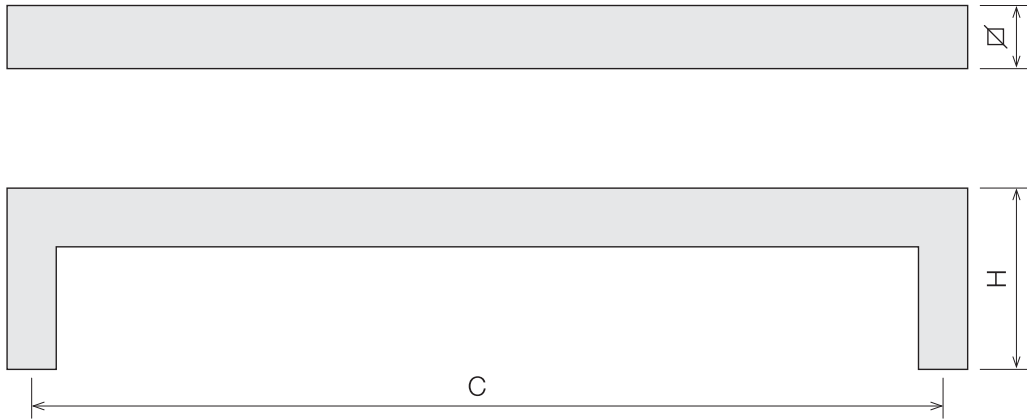

i-4400

	cod.	C	H	descrip.
	58015	150	55	ext.
	58115	150	55	int.
	44015	150	55	set
	58020	200	55	ext.
15	58120	200	55	int.
	44020	200	55	set
	58030	300	55	ext.
	58130	300	55	int.
	44030	300	55	set
	58220	200	65	ext.
	58320	200	65	int.
	44120	200	65	set
	58225	250	65	ext.
20	58325	250	65	int.
	44125	250	65	set
	58230	300	65	ext.
	58330	300	65	int.
	44130	300	65	set
	58425	250	90	ext.
	58525	250	90	int.
	44225	250	90	set
	58430	300	90	ext.
	58530	300	90	int.
30	44230	300	90	set
	58435	350	90	ext.
	58535	350	90	int.
	44235	350	90	set
	58460	600	90	ext.
	58560	600	90	int.
	44260	600	90	set

Cada set incluye 1 int., 1 ext. y kit 4.

Every set includes 1 int., 1 ext. and kit 4.

Chaque set se compose de 1 int., 1 ext. et kit 4.

AISI 304, mate. Tolerancias generales del plano: ±1mm.

AISI 304, matte. General tolerances of technical drawing: ±1mm.

AISI 304, mat. Tolérance générale du plan technique: ±1mm.